


Volume 12

TOUGH LINKS™

FROM LUCKY LINE PRODUCTS, INC.



Locking Spring Snaps

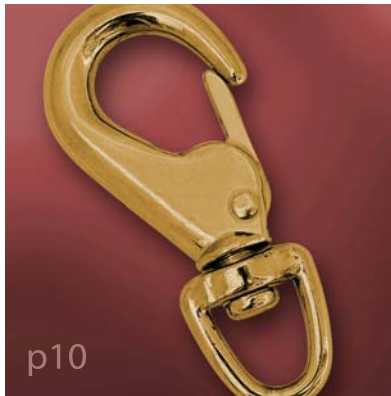

Utility Spring Hooks



Utility Strap Hooks




Interlocking Spring Snaps



Trigger Snaps



Forged Spring Hooks

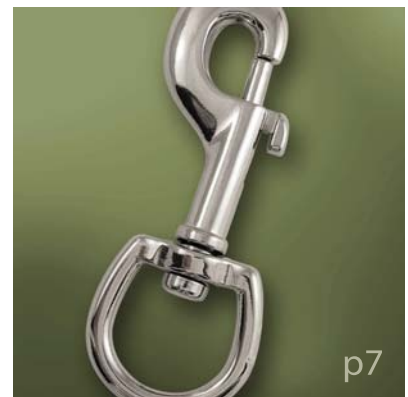

Slide Bolt Snaps

TOUGH LINKS™ Delivers...

FROM LUCKY LINE PRODUCTS, INC.



- In-Stock and Ready to Ship Same Day!
- Low Manufacturer Direct Prices
- Broad Assortment of Hardware
- Individually Labeled, Retail Cards, or Bulk
- Buy Back, Return Policy
- Convenient Ordering: Phone, Fax, Online, EDI
- Personalized Account Management
- Customer-Friendly Credit



Product Index by Name

Name	Page
Interlocking Snaps and Carabineers	2-4
Locking Spring Snaps.....	5
Connectors.....	6
Bolt Snaps.....	7-8
Utility Hooks and Snaps.....	9-11
All-Purpose Hooks / Light Duty Chain & Rope Snaps.....	12-14
Trigger & Panic Release Snaps	15

Phone:
(800) 654-6409 toll-free
(858) 549-6699 local
7:30am to 4:00pm mon-fri, pacific time

24-Hour Fax:
(800) 334-9709 toll-free
(858) 549-0949 local

E-mail: toughlinks@luckyline.com
 Website: www.luckyline.com/toughlinks

PRODUCT USE DISCLAIMER:

Tough Links™ products are not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.







LIMITATION OF LIABILITY:

In no event shall manufacturer be liable to buyer or end user for any indirect, special, incidental, exemplary or consequential damages of any kind arising out of or in connection with this product, however caused and regardless of the theory of liability (whether in contract, tort (including negligence), strict liability or otherwise). User's sole remedy for product(s) that do not meet the specifications shall be, at manufacturer's option (A) the return of the effective goods by buyer to manufacturer, at manufacturer's expense, in which case manufacturer shall reimburse or credit, as applicable, the purchase price to buyer or (B) the delivery of substitute products that meet the specifications.

WARRANTY DISCLAIMER:

Except as expressly set forth in the Lucky Line Products, Inc. warranty, Lucky Line Products, Inc. makes no warranty with respect to this product whatsoever and specifically disclaims all other warranties, whether express or implied, including, without limitation, all warranties regarding the product's fitness for a particular purpose and warranties regarding the product's merchantability.


Types of Finishes

Stainless Steel (SS)	Bronze (BZ)	Aluminum (AL)	Nickel-Plated (NP)	Zinc-Plated (ZP)	Resin Steel, Black (RS)	Plastic (P)
						

Applications

Weather Resistance & Strength	Finish & Materials	Applications
<p>High</p> <p>↑</p> <p>↓</p> <p>Low</p>	<p>Stainless Steel 316 (SS 316)</p> <p>Stainless Steel (SS)</p> <p>Bronze (BZ)</p> <p>Nickel-Plated Brass (NPB)</p> <p>Aluminum (AL)</p> <p>Plated:</p> <p>Nickel-Plated Steel (NPS)</p> <p>Zinc-Plated Steel (ZPS)</p> <p>Nickel-Plated Iron (NPI)</p> <p>Zinc-Plated Iron (ZPI)</p> <p>Nickel-Plated Zinc (NPZ)</p> <p>Resin Steel, Black (RS)</p> <p>Plastic (P)</p>	<p><i>Marine/coastal, outdoor, construction, rigging, heavy corrosion resistance.</i></p> <p><i>Outdoor, construction, rigging, heavy corrosion resistance.</i></p> <p><i>Marine, outdoor, construction, rigging.</i></p> <p><i>Rigging, outdoor, construction.</i></p> <p><i>Outdoor, construction, rigging.</i></p> <p><i>Plating helps to protect the underlying metal from weathering and corrosion. Plated spring snaps most commonly used in light applications. Use plated products in light industrial applications, apparel, farming/agriculture, hobbies and sports. Can also be used as key accessories or in the household sphere. Choose material and plating dependent on application and corresponding strength of material.</i></p> <p><i>Use resin when it is necessary to prevent destructive ingredients from penetrating the metal.</i></p> <p><i>For home use, organization, and light applications where load rating is not an issue and cost is a priority.</i></p>

Attachment Options


Round Eye	Swivel	Open Eye	Fixed Eyelet	Loop/Strap
<i>Reinforced eye provides more strength than swivel, and isolates the rope or cable that goes through the eye.</i>	<i>Eliminates tangling and allows for ease and flexibility of motion for attachments.</i>	<i>Use when rope/wire cannot be fed through eyelet opening. Designed to be closed with vice or hammer after attachment.</i>	<i>Fixed, or stationary, eyelets are stronger than a swivel and keep the rope or attachment in place.</i>	<i>Rectangular loop/strap openings allow for straps and webbing attachments to be fed through cleanly and allow for ease of attachment.</i>
				

Packaging Options

<p>Individual Item Order Item No. (A501)</p> 	<p>Labeled Add "L" to your Part No. (A501L)</p> 	<p>Carded Add "C" to your Part No. (A501C)</p> 
---	--	--


INTERLOCKING SNAPS

Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).




Interlocking Snaps LR

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Use zinc-plated steel for basic corrosion resistance.




Interlocking Snaps LR

- Use as fastener or quick attachment.
- Round edge isolates rope or other fittings.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Use zinc-plated steel for light to medium applications.
- Stainless steel provides superior corrosion resistance for heavy or outdoor applications.



Oval Interlocking Snaps LR

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Use zinc-plated steel for basic corrosion resistance.
- Stainless steel provides superior corrosion resistance for heavy or outdoor applications.



Interlocking Snaps, Black LR

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Resin coating helps to protect destructive elements from penetrating the metal.
- Use resin-coated products for added corrosion resistance.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A501	2-3/8"	1-1/4"	5/16"	5/16"	1/4"	ZPS	200	5
A502	3-1/8"	1-1/2"	7/16"	7/16"	5/16"	ZPS	350	5
A503	4"	2"	1/2"	1/2"	3/8"	ZPS	500	5

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A504	2"	1"	5/16"	1/4"	3/16"	ZPS	175	5
A507	4"	2"	9/16"	1/2"	3/8"	ZPS	675	5
† A508	4-3/4"	2-3/8"	11/16"	5/8"	7/16"	ZPS	820	5
† A509	5-1/2"	2-5/8"	11/16"	11/16"	1/2"	ZPS	950	5
A537	2"	1"	5/16"	1/4"	3/16"	SS	200	5
A538	2-3/8"	1-1/8"	3/8"	5/16"	1/4"	SS	280	5
A539	3-1/8"	1-1/2"	1/2"	3/8"	5/16"	SS	500	5
A540	4"	2"	5/8"	1/2"	3/8"	SS	600	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A510	4"	2"	1-1/8"	11/16"	3/8"	ZPS	500	5
† A511	4-3/4"	2-1/4"	1-3/8"	7/8"	7/16"	ZPS	500	5
† A541	4-3/4"	2-3/8"	3/4"	5/8"	7/16"	SS	700	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A512	2-3/8"	1-1/4"	5/16"	5/16"	1/4"	RS	200	5
A513	3-1/8"	1-1/2"	7/16"	7/16"	5/16"	RS	350	5
A514	4"	2"	1/2"	1/2"	3/8"	RS	500	5

LR *Load Rated Disclaimer:

Not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.

Packaging Options *Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).*

Interlocking Snaps, Black **LR**

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Round eye isolates rope or other fittings.
- Resin coating helps to protect destructive elements from penetrating the metal.
- Use resin-coated products for added corrosion resistance.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A515	2"	1"	1/4"	1/4"	3/16"	RS	175	5
A516	2-3/8"	1-1/8"	5/16"	5/16"	1/4"	RS	205	5
A517	3-1/8"	1-5/8"	7/16"	7/16"	5/16"	RS	380	5
A518	4"	2"	9/16"	7/16"	3/8"	RS	675	5
† A519	4-5/8"	2-1/4"	11/16"	9/16"	7/16"	RS	750	5
† A520	5-1/2"	2-5/8"	11/16"	3/4"	1/2"	RS	950	5

† Item is not available carded



Eyelet Snaps, Black **LR**

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Closed, round eye isolates rope or other fittings.
- Resin coating helps to protect destructive elements from penetrating the metal.
- Use resin-coated products for added corrosion resistance

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A521	2"	1"	3/16"	1/4"	3/16"	RS	175	5
A522	2-3/8"	1-1/8"	1/4"	5/16"	1/4"	RS	205	5
A523	3-1/8"	1-5/8"	3/8"	3/8"	5/16"	RS	380	5
A524	4"	2"	1/2"	1/2"	3/8"	RS	675	5
† A525	4-5/8"	2-1/4"	9/16"	9/16"	7/16"	RS	750	5

† Item is not available carded



Stainless Interlocking Snaps, with Eyelet **LR**

- Use as fasteners or quick attachment.
- Great for use with chain, rope and webbing of equal or lower working load limit.
- Closed, round eye isolates rope or other fittings.
- Use stainless steel for heavy or outdoor applications, where corrosion resistance is a priority.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A542	2"	1"	1/4"	1/4"	3/16"	SS	220	5
A543	2-3/8"	1-1/8"	1/4"	1/4"	1/4"	SS	264	5
A544	3-1/8"	1-1/2"	5/16"	3/8"	5/16"	SS	506	5
A545	4"	2"	1/2"	1/2"	3/8"	SS	770	5
† A546	4-3/4"	2-3/8"	9/16"	11/16"	7/16"	SS	880	5

† Item is not available carded




Stainless Interlocking Snaps **LR**

- Use as fastener or quick attachment of chain, rope or webbing of equal or lower working load limit.
- Can be used for repeated loading.
- Round eye isolates rope or other fittings.
- Use stainless steel for heavy or outdoor applications; provides superior corrosion resistance.
- Ideal for marine, industrial & agricultural use.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A549	2-3/8"	1-3/8"	5/16"	3/8"	1/4"	SS	500	5
A550	3-1/8"	1-7/8"	1/2"	9/16"	5/16"	SS	800	5
A551	3-7/8"	2-1/4"	5/8"	5/8"	3/8"	SS	1000	5
† A552	4-5/8"	2-5/8"	11/16"	13/16"	7/16"	SS	1320	5


† Item is not available carded

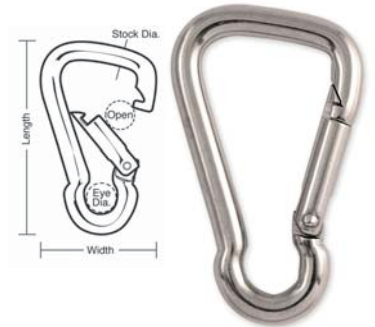

LR *Load Rated Disclaimer:
Not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.


INTERLOCKING SNAPS & CARABINEERS

Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).




Stainless Snaps, with Eyelet LR

- Use as fasteners or quick attachment.
- Can be used for repeated loading.
- Closed, round eye isolates rope or other fittings.
- Use stainless steel for heavy or outdoor applications; provides superior corrosion resistance.
- Ideal for marine, industrial & agricultural use.




Stainless Snaps, Wire Gate LR

- Use as fasteners or quick attachment.
- Unique loop closure.
- Use stainless steel for heavy or outdoor applications; provides superior corrosion resistance.




Stainless Loop Spring Snaps, Wire Gate LR

- Use as fasteners or quick attachment.
- Closed eye isolates rope or other fittings.
- Unique loop closure.
- Use stainless steel for heavy to outdoor applications; provides superior corrosion resistance.



Oval Stainless Loop Spring Snaps, Wire Gate LR

- Use as fasteners or quick attachment.
- Closed eye isolates rope or other fittings.
- Unique loop closure.
- Use stainless steel for heavy to outdoor applications; provides superior corrosion resistance.



Aluminum Carabineer LR

- Quick and easy clip action.
- Large gate clearance and deep basket allow multiple objects to be clipped to the carabineer.
- Designed to meet the needs of boaters.
- Use aluminum for outdoor, construction, or rigging applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A553	2-3/8"	1-3/8"	1/4"	7/16"	1/4"	SS	400	5
A554	3-1/8"	1-3/4"	3/8"	1/2"	5/16"	SS	600	5
A555	3-7/8"	2-1/4"	1/2"	5/8"	3/8"	SS	1000	5
† A556	4-5/8"	2-5/8"	9/16"	13/16"	7/16"	SS	1320	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A561	2-3/8"	1-1/4"	3/8"	3/8"	1/4"	SS	330	5
A562	3-3/16"	1-5/8"	7/16"	1/2"	5/16"	SS	887	5

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A557	2-3/8"	1-3/8"	3/8"	7/16"	1/4"	SS	440	5
A558	3-3/16"	1-3/4"	1/2"	9/16"	5/16"	SS	937	5
A559	4"	2-1/8"	9/16"	11/16"	3/8"	SS	1432	5
† A560	4-7/8"	2-3/4"	3/4"	1"	1/2"	SS	2481	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A563	2-3/8"	1-1/4"	3/8"	7/16"	1/4"	SS	330	5
A564	3-1/8"	1-5/8"	1/2"	9/16"	5/16"	SS	887	5
A565	4"	2-1/8"	9/16"	5/8"	13/32"	SS	1375	5
† A566	4-7/8"	2-3/4"	3/4"	7/8"	7/16"	SS	2100	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A567	4"	2-1/4"	3/4"	3/4"	7/16"	AL	2000	5

LR *Load Rated Disclaimer:

Not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.


Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).

Locking Spring Snaps, Twist Lock **LR**

- Gate twists open and shut by lifting and rotating gate with hand.
- Heavy duty spring snap locks to provide added security.
- Gate closure point is free of sharp edges to prevent snags while attaching or removing snaps.
- Shape of eye isolates rope or other fittings.
- Use zinc-plated steel for basic corrosion resistance.
- Use aluminum for outdoor, construction, or rigging applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
† A569	4-3/4"	2-1/2"	11/16"	7/8"	11/32"	ZPS	1600	5
† A570	4-3/4"	2-3/4"	11/16"	7/8"	3/8"	AL	1600	5

† Item is not available carded

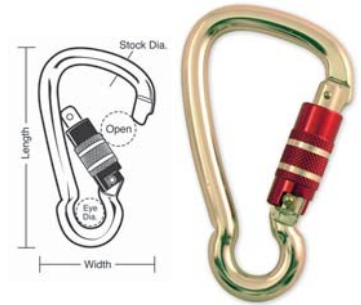


Locking Spring Snaps, Twist Lock **LR**

- Gate twists open and shut by lifting and rotating gate with hand.
- Heavy duty spring snap locks to provide added safe and secure connection.
- Gate closure point is free of sharp edges to prevent snags while attaching or removing snaps.
- Use zinc-plated steel for basic corrosion resistance.
- Use aluminum for outdoor, construction, or rigging applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
† A572	4-1/2"	2-5/8"	1-1/8"	13/16"	7/16"	ZPS	2500	5
† A573	4-1/2"	2-5/8"	1-1/8"	13/16"	1/2"	AL	1500	5

† Item is not available carded

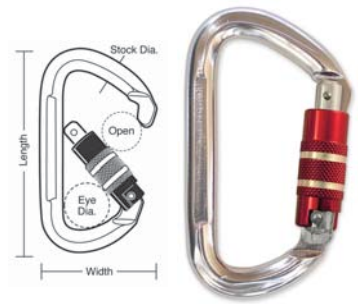


Locking Spring Snaps, Screw Lock **LR**

- Threaded gate screws open and shut.
- Heavy duty spring snap locks to provide added security.
- Gate closure point is free of sharp edges to prevent snags while attaching or removing snaps.
- Use zinc-plated steel for basic corrosion resistance.
- Use aluminum for outdoor, construction, or rigging applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A575	3-5/8"	2"	15/32"	3/8"	3/8"	ZPS	1000	5
A576	3-5/8"	2"	15/32"	3/8"	3/8"	AL	600	5
A578	4"	2-1/4"	1/2"	3/4"	11/32"	ZPS	1200	5
A579	4"	2-1/4"	1/2"	3/4"	13/32"	AL	1200	5
† A581	4-3/4"	2-5/8"	5/8"	13/16"	11/32"	ZPS	1600	5
† A582	4-3/4"	2-3/4"	5/8"	13/16"	7/16"	AL	1600	5

† Item is not available carded

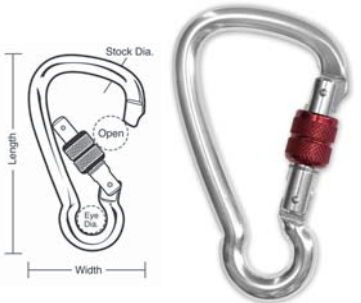


Locking Spring Snaps, Screw Lock **LR**

- Threaded gate screws open and shut.
- Heavy duty spring snap locks to provide added security.
- Gate closure point is free of sharp edges to prevent snags while attaching or removing snaps.
- Use zinc-plated steel for basic corrosion resistance.
- Use aluminum for outdoor, construction, or rigging applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
† A584	4-7/8"	2-3/4"	1"	1"	13/32"	ZPS	2500	5
† A585	4-7/8"	3"	1"	1"	1/2"	AL	2200	5

† Item is not available carded

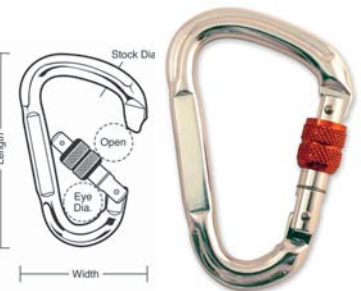

LR *Load Rated Disclaimer:
Not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.


CONNECTORS

Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).




Forged Spring Hooks, Fixed Eye **LR**

- Forged spring snap allows for heavy-use industrial applications.
- Fixed eye attachment for rope or similar fittings.
- For use with rigging and construction applications.
- Zinc-plated steel finish provides basic corrosion resistance.




Forged Stainless Snaps, Wire Gate, Double Eye **LR**

- Spring snap allows for heavy-use industrial applications.
- Unique reinforced eye is part of the body of the spring snap.
- Use stainless steel outdoors or where strength and superior corrosion resistance is a priority.
- Stainless steel type 17-4 PH is 17% chromium and 4% nickel. Has been precipitation hardened to higher strength capacities.



Stainless Snaps, Wire Gate, Fixed Eye **LR**

- Forged-style spring snap allows for heavy-use industrial applications.
- Unique reinforced eye is part of the body of the spring snap.
- Use stainless steel outdoors or where superior corrosion resistance is a priority.



Threaded Quick Link Connectors **LR**

- Threaded connectors twist open and shut easily.
- Connectors are designed to join or repair low carbon steel chain lengths.
- Load-rated for heavy applications.
- Use with chain of equal or lower work load limit.
- Stainless steel is ideal for use outdoors.
- Superior corrosion resistance.



Welded Rings **LR**

- Solid welded rings are load-rated for heavy applications.
- Used for harness assemblies and craft projects.
- Zinc-plated steel finish provides basic corrosion resistance.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
† A589	4-1/4"	2-1/2"	11/16"	5/8"	ZPS	750	5
A590	3-1/2"	1-3/4"	11/16"	1/2"	ZPS	1000	5

† Item is not available carded

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A594	2-3/4"	1-1/2"	5/16"	7/16"	SS 17-4 PH	1000	5
A595	4"	2"	1/2"	9/16"	SS 17-4 PH	1500	5

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A591	2"	1"	1/4"	11/32"	SS	165	5
A592	2-3/4"	1-1/8"	3/8"	13/32"	SS	387	5
A593	3-3/4"	1-3/4"	9/16"	9/16"	SS	825	5

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A745	1-3/8"	3/4"	3/8"	3/16"	1/8"	SS	400	5
A746	1-15/16"	1"	1/2"	1/4"	3/16"	SS	800	5
A748	2-15/16"	1-1/2"	11/16"	13/32"	5/16"	SS	2000	5
A749	3-1/2"	1-3/4"	13/16"	15/32"	3/8"	SS	3500	5
A759	1-3/8"	3/4"	3/8"	3/16"	1/8"	ZPS	220	5
A760	2"	1"	7/16"	1/4"	3/16"	ZPS	660	5
A761	2-5/16"	1-1/8"	1/2"	5/16"	1/4"	ZPS	880	5
A762	3"	1-1/2"	5/8"	3/8"	5/16"	ZPS	1760	5
A763	3-1/2"	1-3/4"	3/4"	1/2"	3/8"	ZPS	2640	5
† A764	4-3/16"	2"	13/16"	9/16"	1/2"	ZPS	3300	5

† Item is not available carded

Item No.	Overall Length	Width	Inside Dia.	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A750	2"	2"	1-1/2"	1/4"	ZPS	450	5
A751	2-5/8"	2-5/8"	2"	5/16"	ZPS	600	5

LR *Load Rated Disclaimer:

Not intended for climbing or overhead lifting, or support of human weight, athletic or playground equipment.

Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).

Slide Bolt Snaps, Swivel Eye

- Slide bolt supplied with spring-loaded latch for quick and easy attachments.
- Supplied with swivel to prevent tangling, and ease of motion of attachments.
- Choose nickel-plated zinc for light applications.
- Choose bronze/brass when an aesthetic appearance is preferred.
- Choose stainless steel for outdoor applications, and where corrosion resistance is a priority.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* 00445	2-1/8"	3/4"	5/16"	3/16"	NPZ	Not Load Rated	5
A705	2-1/2"	7/8"	3/8"	1/4"	NPZ	Not Load Rated	5
00451	3"	1-1/8"	1/2"	5/16"	NPZ	Not Load Rated	5
A708	3-1/2"	1-1/4"	5/8"	3/8"	NPZ	Not Load Rated	5
A709	3-1/2"	1-1/4"	3/4"	3/8"	NPZ	Not Load Rated	5
A710	3-3/4"	1-3/8"	7/8"	3/8"	NPZ	Not Load Rated	5
A711	3-7/8"	1-1/2"	1"	3/8"	NPZ	Not Load Rated	5
A712	4-1/16"	1-5/8"	7/8"	3/8"	NPZ	Not Load Rated	5
A713	3-1/4"	1-1/8"	5/8"	5/16"	NPI	Not Load Rated	5
00450	3"	1"	7/16"	1/4"	BZ	Not Load Rated	5
† A716	4-3/4"	1-7/8"	1-1/4"	9/16"	BZ	Not Load Rated	5
00448	3-1/4"	1-1/4"	11/16"	5/16"	Brass	Not Load Rated	5
A717	1-7/8"	3/4"	5/16"	1/8"	NPB	Not Load Rated	5
A718	2-1/2"	7/8"	7/16"	1/4"	SS	Not Load Rated	5
A719	3-1/8"	1-1/4"	1/2"	5/16"	SS	Not Load Rated	5
A720	3-7/16"	1-1/4"	5/8"	3/8"	SS	Not Load Rated	5
A721	3-5/8"	1-1/4"	3/4"	3/8"	SS	Not Load Rated	5
† A722	4-3/4"	1-7/8"	1-5/16"	1/2"	SS	Not Load Rated	5
† A723	4-7/8"	1-7/8"	1-7/16"	1/2"	SS	Not Load Rated	5

* Carded option is supplied 2/card

† Item is not available carded



Slide Bolt Snaps, Fixed Eye

- Slide bolt supplied with spring-loaded latch for quick and easy attachment.
- Great for light use with rope, lanyard, chain, or as a key accessory.
- Fixed eye keeps rope or other attachments securely in place.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A686	3-1/4"	1-1/4"	1/2"	7/16"	NPZ	Not Load Rated	5
A687	3-3/8"	1-1/4"	5/8"	7/16"	NPZ	Not Load Rated	5
A688	3-1/2"	1-1/4"	3/4"	7/16"	NPZ	Not Load Rated	5



Bolt Snaps, Open Eye

- Slide bolt supplied with spring-loaded latch for quick and easy attachment.
- Open eye for use when rope or wire cannot be fed through eyelet opening.
- Eye is designed to be closed with vice or hammer after attaching chain or rope.
- Open eye is notched for secure fit when closed around the interlocking hook.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A696	2-5/8"	1-1/8"	5/16"	5/16"	ZPI	Not Load Rated	5
A697	3-3/8"	1-1/8"	3/8"	11/32"	ZPI	Not Load Rated	5
A698	3-1/2"	1-3/8"	9/16"	3/8"	ZPI	Not Load Rated	5
A699	4"	1-3/8"	9/16"	3/8"	ZPI	Not Load Rated	5
† A700	6"	2-1/4"	1"	9/16"	ZPI	Not Load Rated	5
† A701	5-1/2"	2-1/8"	7/8"	9/16"	ZPI	Not Load Rated	5
A702	3-1/2"	1-1/8"	1/2"	3/8"	BZ	Not Load Rated	5
A703	4"	1-3/8"	9/16"	3/8"	BZ	Not Load Rated	5

* Carded option is supplied 2/card

† Item is not available carded




Butterfly Slide Bolt Snap

- Also referred to as a halyard snap.
- The extra openings in this unique slide bolt allow for added versatility.
- Swivel allows for ease of motion.
- Popular for use with rigging, rope, and boating applications.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A727	3-5/8"	1-1/2"	3/4"	3/8"	BZ	Not Load Rated	5




Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).




Double Slide Bolt Snaps

- Slide bolt supplied with spring-loaded latch for quick and easy attachment.
- Two sides allow for multiple attachments.
- Choose bronze or stainless steel for outdoor applications, where corrosion resistance is a priority.
- For light applications.




Slide Bolt Snap, Strap Eye

- Slide bolt supplied with spring-loaded latch for quick and easy attachment.
- Unique rectangular eye for use with straps or webbing.
- Fixed eye keeps strap securely in place.
- For light applications.




Slide Bolt Snap, Swivel Strap Eye

- Slide bolt supplied with spring-loaded latch for quick and easy attachments.
- Unique rectangular eye for use with straps or webbing.
- Swivel allows for ease of motion and prevents tangling.
- For light applications.



Safety Snaps, Swivel Eye

- Unique rectangular eye for use with straps or webbing.
- Swivel allows for ease of motion.
- Requires two finger operation for added safety.



Color Bolt Snaps, Swivel Eye

- Slide bolt snap with spring-loaded latch for quick and easy attachments.
- Operates by thumb action to open and close.
- Swivel prevents tangling, and offers ease of motion of attachments.
- For light use on backpacks, leashes, chain gates.

Item No.	Overall Length	Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
00449	3-1/2"	1-1/8"	3/8"	NPZ	Not Load Rated	5
A690	4"	1-1/4"	3/8"	NPZ	Not Load Rated	5
† A691	4-5/8"	1-1/4"	7/16"	NPZ	Not Load Rated	5
A692	4"	1-1/4"	5/16"	ZPI	Not Load Rated	5
† A693	4-5/8"	1-3/8"	7/16"	ZPI	Not Load Rated	5
† A694	4-3/4"	1-1/4"	7/16"	BZ	Not Load Rated	5
A695	4"	1-1/4"	7/16"	SS	Not Load Rated	5

† Item is not available carded

Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A704	3-3/8"	1-1/2"	1/2"H x 1"W	7/16"	NPZ	Not Load Rated	5

Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A726	3-1/8"	1-1/2"	5/16"H x 1"W	5/16"	NPZ	Not Load Rated	5

Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A724	3-1/4"	1-1/4"	5/16"H x 5/8"W	7/16"	NPZ	Not Load Rated	5
A725	3-1/4"	1-1/4"	5/16"H x 3/4"W	7/16"	NPZ	Not Load Rated	5

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A45530	3"	1"	3/8"	3/8"	Zinc, Blue	Not Load Rated	5
A45540	3"	1"	3/8"	3/8"	Zinc, Green	Not Load Rated	5
A45565	3"	1"	3/8"	3/8"	Zinc, Purple	Not Load Rated	5
A45570	3"	1"	3/8"	3/8"	Zinc, Red	Not Load Rated	5

Colors: ■ Blue (30) ■ Green (40) ■ Purple (65) ■ Red (70)

Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).

Utility Strap Hooks

- Single hook snap designed for quick attachment.
- Spring gate allows for one-handed operation.
- Unique rectangular eye for use with straps and webbing.
- Fixed eye keeps strap securely in place.
- For light applications.


Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A652	3"	1"	3/8"H x 5/8"W	5/16"	NPZ	Not Load Rated	5
A653	3"	1-1/8"	3/8"H x 3/4"W	5/16"	NPZ	Not Load Rated	5
A654	3"	1-3/8"	3/8"H x 1"W	5/16"	NPZ	Not Load Rated	5



Utility Spring Snap, Swivel Strap Eye

- Grooved latch for easy one-handed operation.
- Unique rectangular eye for use with straps or webbing.
- Swivel allows for ease of motion and prevents tangling.
- For light applications.

Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A683	2-3/8"	1-3/8"	1/4"H x 1"W	3/16"	NPZ	Not Load Rated	5
A684	2-5/8"	1-7/8"	3/8"H x 1-1/2"W	3/16"	NPZ	Not Load Rated	5
A685	2-5/8"	2-1/2"	3/8"H x 2"W	3/16"	NPZ	Not Load Rated	5

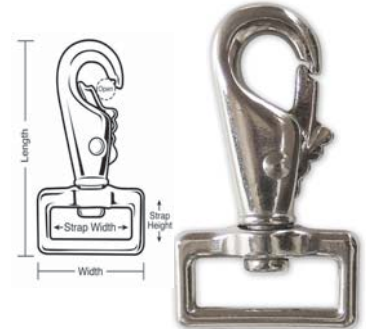

Plastic Utility Hooks, Black, Swivel Strap Eye

- Single hook snap designed for quick attachment.
- Easy one-handed operation.
- Swivel allows to ease of motion and prevents tangling.
- Unique rectangular eye for use with straps or webbing.
- For light applications.

Item No.	Overall Length	Width	Strap Height x Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A679	2-1/2"	1-1/8"	3/16"H x 3/4"W	1/4"	Plastic, Blk.	Not Load Rated	5
* A680	2-1/2"	1-3/8"	3/16"H x 1"W	1/4"	Plastic, Blk.	Not Load Rated	5
* A681	2-1/2"	1-7/8"	3/16"H x 1-1/2"W	1/4"	Plastic, Blk.	Not Load Rated	5
* A682	2-1/2"	2-3/8"	3/16"H x 2"W	1/4"	Plastic, Blk.	Not Load Rated	5

* Carded option is supplied 2/card



Utility Spring Hooks, Fixed Eye

- Single hook snaps are designed for quick attachment.
- Spring gate allows for one-handed operation.
- Supplied with fixed eye for rope or similar fittings.
- Use bronze or stainless steel when corrosion resistance is a priority.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A613	2"	1"	7/16"	1/4"	NPZ	Not Load Rated	5
A614	2-3/8"	1-1/8"	15/32"	5/16"	NPZ	Not Load Rated	5
A615	2-3/4"	1-1/4"	9/16"	13/32"	NPZ	Not Load Rated	5
A616	3-3/8"	1-5/8"	11/16"	1/2"	NPZ	Not Load Rated	5
A617	3-7/8"	1-7/8"	13/16"	5/8"	NPZ	Not Load Rated	5
† A618	4-5/8"	2-1/4"	1"	3/4"	NPZ	Not Load Rated	5
A619	2"	7/8"	3/8"	3/16"	SS	Not Load Rated	5
A620	2-3/4"	1-1/4"	5/8"	3/8"	SS	Not Load Rated	5
A621	3-3/16"	1-3/8"	11/16"	7/16"	SS	Not Load Rated	5
A622	3-3/4"	1-3/4"	23/32"	9/16"	SS	Not Load Rated	5
A752	2-1/8"	1"	3/8"	1/4"	BZ	Not Load Rated	5
A753	2-3/4"	1-1/4"	5/8"	5/16"	BZ	Not Load Rated	5
A754	3-3/4"	1-7/8"	3/4"	5/8"	BZ	Not Load Rated	5

† Item is not available carded



UTILITY HOOKS & SNAPS

Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).



Utility Spring Hooks, Swivel Eye

- Utility hooks are designed for quick attachment.
- Swivel eye eliminates tangling of attachments.
- Use nickel-plated zinc for basic corrosion resistance.
- Use bronze or stainless steel when corrosion resistance is a priority.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A623	3"	1-3/8"	7/16"	7/16"	NPZ	Not Load Rated	5
A624	3-1/16"	1-3/8"	1/2"	7/16"	NPZ	Not Load Rated	5
00447	3-1/4"	1-3/8"	5/8"	7/16"	NPZ	Not Load Rated	5
A627	3-1/2"	1-1/2"	1"	7/16"	NPZ	Not Load Rated	5
A628	3-1/4"	1-1/4"	5/8"	5/16"	BZ	Not Load Rated	5
A629	3-3/4"	1-1/2"	3/4"	9/16"	BZ	Not Load Rated	5
† A630	4-3/8"	1-5/8"	7/8"	9/16"	BZ	Not Load Rated	5
A631	3-3/8"	1-1/4"	11/16"	3/8"	SS	Not Load Rated	5
A632	3-7/8"	1-3/8"	3/4"	7/16"	SS	Not Load Rated	5
† A633	4-5/8"	1-5/8"	7/8"	7/16"	SS	Not Load Rated	5

† Item is not available carded



Animal Tie Snap, Fixed Eye

- Strong and secure animal tie snap is ideal for use with ropes.
- Safe, two-handed operation.
- Provided with fixed eye and unique, flat snap opening.
- Used in light applications and popular in the agricultural, equestrian, and farming industries.
- Supplied in nickel-plated iron.


Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A609	3-3/4"	1-1/2"	3/4"	1/2"	NPI	Not Load Rated	5



Animal Tie Snap, Swivel Eye

- Strong and secure animal tie snap is ideal for use with ropes.
- Spring-loaded latch for easy attachment.
- Round swivel eye eliminates tangling of attachments.
- Designed for light applications and popular as cattle/livestock lead ropes or tie downs.
- Supplied in nickel-plated iron.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A634	4"	1-5/8"	3/4"	7/16"	NPI	Not Load Rated	5



Breaching Snaps, Wire Gate

- All-purpose snap has unique loop gate.
- Push the spring end to connect in one motion.
- For use on chain gates or dog leashes, and for light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A647	1-7/8"	3/4"	3/8"	5/16"	ZPS	Not Load Rated	5
* A648	2-1/2"	1"	7/16"	3/8"	ZPS	Not Load Rated	5

* Carded option is supplied 2/card

Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).

All-Purpose Hook

- Utility hook is ideal for light industrial applications.
- Spring-loaded latch allows for quick and easy attachment and release.
- Closed eye isolates rope or other fittings.
- Supplied in zinc-plated steel for basic corrosion resistance.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A603	4"	2"	1/2"	13/16"	ZPS	Not Load Rated	5



Double-Ended Cap Snaps

- Double hook snap is ideal for light applications with rope or chain.
- Two sides allow for multiple attachments.
- Use nickel-plated iron for light to medium applications and moderate corrosion resistance.
- Use bronze for outdoor, marine and equestrian applications, and where corrosion resistance is a priority.

Item No.	Overall Length	Width	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A610	3-7/8"	1"	1/4"	NPI	Not Load Rated	5
† A611	5-1/8"	1-3/8"	3/8"	NPI	Not Load Rated	5
† A755	5-1/2"	1-3/8"	7/16"	BZ	Not Load Rated	5

† Item is not available carded



Cap Snap, Fixed Eye

- Ideal for light applications with rope or chain.
- Supplied with fixed eye for rope or similar fittings.
- Spring gate allows for one-handed operation.
- Supplied in zinc-plated iron.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
† A612	4-3/4"	1-3/4"	5/8"	9/16"	ZPI	Not Load Rated	5

† Item is not available carded



Cap Snaps, Swivel Eye

- Single hook snap designed for quick attachment.
- Swivel eye eliminates tangling of attachments.
- Spring gate allows for one-handed operation.
- Supplied in zinc-plated iron for light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A635	3-1/2"	1-1/4"	5/8"	3/8"	ZPI	Not Load Rated	5
† A636	4-1/2"	1-3/4"	1-1/8"	7/16"	ZPI	Not Load Rated	5

† Item is not available carded



ALL-PURPOSE HOOKS & SNAPS

Packaging Options Products are sold individually in bulk unless specified. Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).



All-Purpose Hooks, Swivel Eye

- Single hook snap designed for quick attachment.
- Easy one-handed operation.
- Swivel allows for ease of motion of attachments.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A675	2"	1/2"	5/16"	3/16"	NPZ	Not Load Rated	5
* A676	2"	5/8"	7/16"	3/16"	NPZ	Not Load Rated	5
* A677	3-5/8"	1-1/8"	3/4"	5/16"	NPZ	Not Load Rated	5

* Carded option is supplied 2/card



All-Purpose Hook, Open Swivel

- Single hook snap designed for quick attachment.
- Easy one-handed operation.
- Eye is designed to be closed with vice or hammer after chain attachment.
- Open eye swivel for use with attachments that cannot be fed through eyelet opening.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A678	2-1/2"	7/8"	3/8"	3/16"	NPZ	Not Load Rated	5


* Carded option is supplied 2/card



All-Purpose Snap, Fixed Eye

- Single hook snap designed for quick attachment.
- Spring gate allows for one-handed operation.
- Fixed eye attachment keeps rope or other fitting in place.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A651	3-1/4"	1"	5/8"	5/16"	NPZ	Not Load Rated	5



All-Purpose Snaps, Open Eye

- Single hook snap designed for quick attachment.
- Spring gate allows for one-handed operation.
- Open eye snap used when rope or wire cannot be fed through eyelet opening.
- Eye is designed to be closed with vice or hammer after attachment.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A649	2-7/8"	1"	7/16"	5/16"	NPI	Not Load Rated	5
A650	2-7/8"	1"	7/16"	1/4"	ZPI	Not Load Rated	5

Packaging Options Products are sold individually in bulk unless specified.
 Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).


Light Duty Snap Hooks

- For light use and small items, such as lanyards, key tags, and accessories.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
** A637	1"	3/8"	7/32"	3/16"	NPS	Not Load Rated	5
** A638	1-3/16"	3/8"	1/4"	1/4"	NPS	Not Load Rated	5
** A639	1-3/8"	1/2"	9/32"	5/32"	NPS	Not Load Rated	5
* A640	1-5/8"	1/2"	1/4"	1/4"	NPS	Not Load Rated	5
* A641	1-3/4"	5/8"	3/8"	1/4"	NPS	Not Load Rated	5
* A642	2"	5/8"	3/8"	1/4"	NPS	Not Load Rated	5
* A643	2-3/8"	3/4"	13/32"	5/16"	NPS	Not Load Rated	5
* A644	2-3/4"	3/4"	7/16"	5/16"	NPS	Not Load Rated	5

** Carded option is supplied 12/clamshell. Bulk product must be ordered in multiples of 10

* Carded option is supplied 6/clamshell. Bulk product must be ordered in multiples of 10



Light Duty Snap Hooks, D-Swivel

- For light use and small items, such as lanyards, key tags, and accessories.
- Supplied with D-swivel, for ease of motion and to eliminate tangling of attachments.
- Roller ferrule on eye protects strap from excessive wear.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A665	2-3/8"	1/2"	3/8"	1/4"	NPS	Not Load Rated	5
* A666	2-5/8"	1/2"	3/8"	5/16"	NPS	Not Load Rated	5

* Carded option is supplied 2/card



Light Duty Snap Hooks, Swivel Eye

- For light use and small items, such as lanyards, key tags, and accessories.
- Supplied with swivel attachment for ease of motion and to eliminate tangling of attachment.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A667	3-1/2"	3/4"	1/2"	1/4"	NPS	Not Load Rated	5
* A668	4-1/4"	7/8"	1/2"	1/4"	NPS	Not Load Rated	5

* Carded option is supplied 2/card




Chain Snap Hooks, Open Swivel

- Designed for use with chain attachment.
- Open eye designed to be closed with pliers once chain is fed through.
- Swivel eye allows 360° turning to minimize tangling.
- For light chain applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A671	2-3/4"	3/4"	1/4"	3/16"	ZPS	Not Load Rated	5
* A672	3-1/8"	1"	7/16"	5/16"	ZPS	Not Load Rated	5
* A673	3-3/8"	7/8"	1/2"	1/4"	ZPS	Not Load Rated	5
* A674	3-3/8"	1"	1/2"	5/16"	ZPS	Not Load Rated	5

* Carded option is supplied 2/card



ALL-PURPOSE HOOKS / LIGHT DUTY CHAIN & ROPE SNAPS

Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).



Rope Snaps, Welded Ring Swivel

- For light use with rope.
- Supplied with welded ring swivel, for ease of motion and more secure attachments.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
† A669	4-1/2"	1-1/8"	3/4"	5/16"	ZPS	Not Load Rated	5
† A670	4-5/8"	1-1/4"	7/8"	5/16"	ZPS	Not Load Rated	5

† Item is not available carded



Rope Snaps, Light Duty

- For light use with rope or webbing.
- Fixed eye attachment keeps rope in place.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
† A645	4"	1"	9/16"	3/8"	ZPS	Not Load Rated	5
† A646	4"	1-1/4"	5/8"	3/8"	ZPS	Not Load Rated	5

† Item is not available carded



Plastic All-Purpose Rope Snap

- All-purpose snap is supplied in plastic for light applications.
- Round eye allows for rope or other attachment to be snapped into place and held secure.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
* A658	1-7/8"	3/4"	3/16"	3/16"	Plastic, Blk.	Not Load Rated	5

* Carded option is supplied 4/clamshell



C-Clips

- Spring-loaded gate makes it easy to open and close with one hand.
- Angled edge allows for an easy and quick attachment.
- Anodized aluminum provides good corrosion resistance.
- For light applications.
- Not made for climbing.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Stock Dia.	Material	Work Load Limit, lbs.	Order Multi.
A46020	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Black, AA	Not Load Rated	5
A46030	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Blue, AA	Not Load Rated	5
A46040	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Green, AA	Not Load Rated	5
A46065	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Purple, AA	Not Load Rated	5
A46070	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Red, AA	Not Load Rated	5
A46093	2-3/8"	1-1/4"	1/2"	9/16"	3/16"	Silver, AA	Not Load Rated	5
A46120	3"	1-5/8"	5/8"	5/8"	1/4"	Black, AA	Not Load Rated	5
A46130	3"	1-5/8"	5/8"	5/8"	1/4"	Blue, AA	Not Load Rated	5
A46140	3"	1-5/8"	5/8"	5/8"	1/4"	Green, AA	Not Load Rated	5
A46165	3"	1-5/8"	5/8"	5/8"	1/4"	Purple, AA	Not Load Rated	5
A46170	3"	1-5/8"	5/8"	5/8"	1/4"	Red, AA	Not Load Rated	5
A46193	3"	1-5/8"	5/8"	5/8"	1/4"	Silver, AA	Not Load Rated	5

Colors: ■ Black (20) ■ Blue (30) ■ Green (40) ■ Purple (65) ■ Red (70) ■ Silver (93)

Packaging Options Products are sold individually in bulk unless specified.
Add "L" to Item No. for Individually Labeled (Ex. A501L). Add "C" for Individually Carded (Ex. A501C).

Trigger Snaps, Swivel Eye

- Operates by thumb. Press on lever to open, release to close.
- Great for use on ropes, lanyards, or as a key accessory.
- Swivel allows for ease of motion of attachment.
- Use nickel-plated zinc for basic corrosion resistance.
- Use bronze or stainless steel when corrosion resistance is a priority.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
00441	2-1/2"	1-1/4"	1/2"	7/16"	NPZ	Not Load Rated	5
A736	2-5/8"	1-1/4"	5/8"	7/16"	NPZ	Not Load Rated	5
A737	2-3/4"	1-1/4"	3/4"	7/16"	NPZ	Not Load Rated	5
A739	3-3/4"	1-1/2"	3/4"	3/4"	NPZ	Not Load Rated	5
00440	2-5/8"	1-1/4"	1/2"	7/16"	BZ	Not Load Rated	5
A743	2-1/2"	1-1/4"	1/2"	7/16"	SS	Not Load Rated	5
A744	2-5/8"	1-1/4"	5/8"	7/16"	SS	Not Load Rated	5



Small Trigger Snap, Swivel Eye

- Operates by thumb. Press on lever to open, release to close.
- Swivel prevents tangling, and allows for ease of motion of attachments.
- For light use on camera bags, dog leashes, purses, garment bags.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
*00443	1-5/8"	3/4"	5/16"	3/16"	NPZ	Not Load Rated	5



* Carded option is supplied 2/card



Panic Release Snap

- Great for use in case of an emergency.
- Spring operated sleeve allows positive-locking and quick release.
- Can be opened under load.
- Downward force quickly opens this snap, releasing the load.
- Popular in the equestrian industry.
- For light applications.

Item No.	Overall Length	Width	Eye Dia.	Snap Open	Material	Work Load Limit, lbs.	Order Multi.
A733	4"	1-3/8"	1/2"	9/16"	NPI	Not Load Rated	5



Product Index by Number

Item No	Page	Item No	Page	Item No	Page	Item No	Page
00440.....	15	A557.....	4	A633.....	10	A696.....	7
00441.....	15	A558.....	4	A634.....	10	A697.....	7
00443.....	15	A559.....	4	A635.....	11	A698.....	7
00445.....	7	A560.....	4	A636.....	11	A699.....	7
00447.....	10	A561.....	4	A637.....	13	A700.....	7
00448.....	7	A562.....	4	A638.....	13	A701.....	7
00449.....	8	A563.....	4	A639.....	13	A702.....	7
00450.....	7	A564.....	4	A640.....	13	A703.....	7
00451.....	7	A565.....	4	A641.....	13	A704.....	8
A455.....	8	A566.....	4	A642.....	13	A705.....	7
A460.....	14	A567.....	4	A643.....	13	A708.....	7
A461.....	14	A569.....	5	A644.....	13	A709.....	7
A501.....	2	A570.....	5	A645.....	14	A710.....	7
A502.....	2	A572.....	5	A646.....	14	A711.....	7
A503.....	2	A573.....	5	A647.....	10	A712.....	7
A504.....	2	A575.....	5	A648.....	10	A713.....	7
A507.....	2	A576.....	5	A649.....	12	A716.....	7
A508.....	2	A578.....	5	A650.....	12	A717.....	7
A509.....	2	A579.....	5	A651.....	12	A718.....	7
A510.....	2	A581.....	5	A652.....	9	A719.....	7
A511.....	2	A582.....	5	A653.....	9	A720.....	7
A512.....	2	A584.....	5	A654.....	9	A721.....	7
A513.....	2	A585.....	5	A658.....	14	A722.....	7
A514.....	2	A589.....	6	A665.....	13	A723.....	7
A515.....	3	A590.....	6	A666.....	13	A724.....	8
A516.....	3	A591.....	6	A667.....	13	A725.....	8
A517.....	3	A592.....	6	A668.....	13	A726.....	8
A518.....	3	A593.....	6	A669.....	14	A727.....	7
A519.....	3	A594.....	6	A670.....	14	A733.....	15
A520.....	3	A595.....	6	A671.....	13	A736.....	15
A521.....	3	A603.....	11	A672.....	13	A737.....	15
A522.....	3	A609.....	10	A673.....	13	A739.....	15
A523.....	3	A610.....	11	A674.....	13	A743.....	15
A524.....	3	A611.....	11	A675.....	12	A744.....	15
A525.....	3	A612.....	11	A676.....	12	A745.....	6
A537.....	2	A613.....	9	A677.....	12	A746.....	6
A538.....	2	A614.....	9	A678.....	12	A748.....	6
A539.....	2	A615.....	9	A679.....	9	A749.....	6
A540.....	2	A616.....	9	A680.....	9	A750.....	6
A541.....	2	A617.....	9	A681.....	9	A751.....	6
A542.....	3	A618.....	9	A682.....	9	A752.....	9
A543.....	3	A619.....	9	A683.....	9	A753.....	9
A544.....	3	A620.....	9	A684.....	9	A754.....	9
A545.....	3	A621.....	9	A685.....	9	A755.....	11
A546.....	3	A622.....	9	A686.....	7	A759.....	6
A549.....	3	A623.....	10	A687.....	7	A760.....	6
A550.....	3	A624.....	10	A688.....	7	A761.....	6
A551.....	3	A627.....	10	A690.....	8	A762.....	6
A552.....	3	A628.....	10	A691.....	8	A763.....	6
A553.....	4	A629.....	10	A692.....	8	A764.....	6
A554.....	4	A630.....	10	A693.....	8		
A555.....	4	A631.....	10	A694.....	8		
A556.....	4	A632.....	10	A695.....	8		

Lucky Line's Long Standing Commitment to Our Environment



- Post-consumer waste products are used company-wide;
- Paperless ordering process-from quotation to purchase order to order acknowledgement to invoice;
- Recyclable packaging;
- Clamshells & ID Tags are made of RPET recycled plastic;
- Environmentally friendly packing and shipping supplies;
- All marketing efforts utilize green mail centers only;
- Paperless Banking;
- Optimized energy settings on all company computers;
- Energy-saving thermostat controls;
- Energy-saving lighting & window tinting;
- Support of employee carpool program;
- Flexible telecommuting allowed for select job functions;
- We recycle all office paper, printer cartridges and beverage bottles;
- Ongoing commitment to increase our green practices.

**TOUGH
LINKS**
FROM LUCKY LINE PRODUCTS, INC.

A Brand of
Lucky Line Products, Inc.
7890 Dunbrook Road
San Diego, CA 92126-4369
1-800-654-6409

Volume 12



CONTACT INFORMATION

(800) 654-6409 toll-free

(858) 549-6699

Office hours:

7:30am to 4:00pm Pacific Time

24-Hour Fax:

(800) 334-9709 toll-free

(858) 549-0949

E-mail: toughlinks@luckyline.com

Website: www.luckyline.com/toughlinks

Address:

Lucky Line Products, Inc.

7890 Dunbrook Road

San Diego, CA 92126-4369